


## Kongres Container

# Outdoor Communication Power Supply BESS Success Case

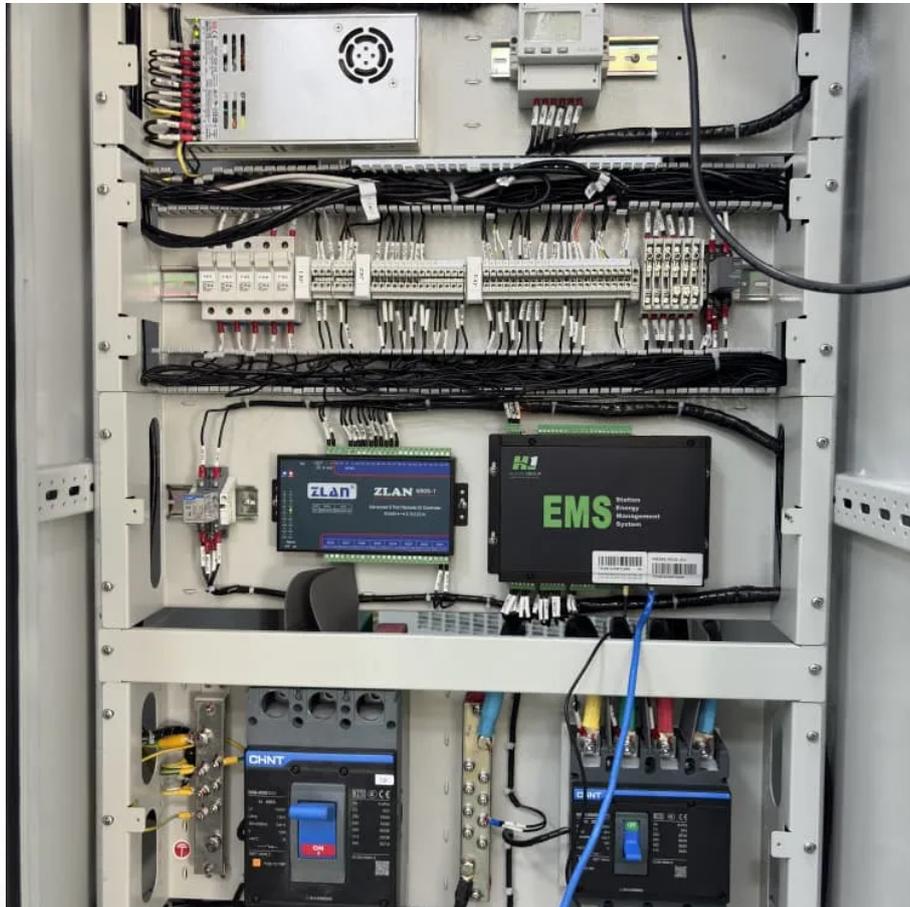

## Overview

---

Which is a typical utility Bess use case?

Which is one of the most typical utility BESS use cases, providing setpoints through operator or automatic control as in ancillary services. The three mobile storage applications presented in this section were identified and chosen through some application criteria. The applications presented focuses mainly on industrial and utility cases.

Does Bess require uninterrupted power?

Some BESS suppliers mandate uninterrupted power to maintain the operation of thermal management systems, ensuring battery temperatures remain within desired limits to minimize degradation. BESS fire safety standards, such as NFPA 855, outline minimum requirements for backup power for fire safety systems.

How much power does a Bess have?

The system is built of two main blocks. The PCS building block, responsible for the main control of the mobile BESS. The nominal power rating of the PCS block is 225 kVA, with a maximum peak power in the peak shaving mode of 275 kW . The second block is the modular battery pack.

Do I need backup power for a Bess auxiliary load?

For certain projects, backup power must be provided for the BESS auxiliary load as required by the BESS supplier or fire codes. Some BESS suppliers mandate uninterrupted power to maintain the operation of thermal management systems, ensuring battery temperatures remain within desired limits to minimize degradation.

Why should you choose a Bess energy storage system?

The mobility and flexibility of the system enables novel applications and deployments where BESS previously were unused due to the non-flexible

solutions. The system is modular, meaning that the energy storage capacity can be quickly adapted depending on the application case, in contrast to larger and bulkier solutions.

Who is responsible for the electricity costs associated with Bess auxiliary loads?

Project owners are also responsible for the electricity costs associated with the BESS auxiliary load during operation. The electricity cost for auxiliary loads depends on the energy consumption (kWh) and the pricing structure set by independent system operators or utilities. For example:

## Outdoor Communication Power Supply BESS Success Case

---

### Contact Us

---

For catalog requests, pricing, or partnerships, please visit:  
<https://drugiswiatowykongrespolakow.pl>